


- 1. Lamp Wattage 7.9 W
- 2. Lamp Current 0.170 ± 0.020 A
- 3. Lamp Voltage 56 V
- 4. Tube Length(L) 287.0 ± 1.3 mm
- 5. Tube Diameter(D) 15.5 ± 0.8 mm
- 6. Base G5
- 7. Spectral Peak 306 nm
- 8. UV Output 1.6 W
- 9. UV Micro-watts $17.2 \mu\text{W}/\text{cm}^2$ (at 1m)
- 10. Average Life 3,000 hrs
- 11. Ballast F8T5
- 12. Glow Starter FG7P (JIS)
- 13. Circuit

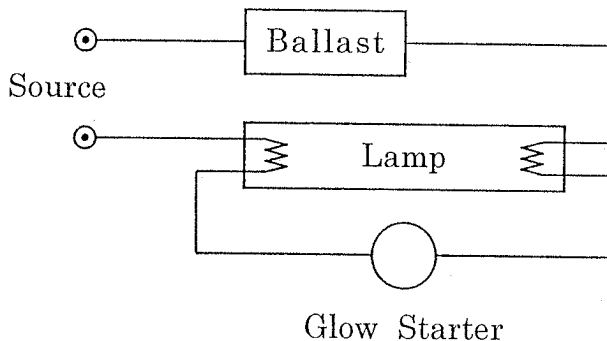

				TITLE UV-B Lamp G8T5. E	
1999-10-28 Correct UV output and UV micro-watts Tamura				DWG NO. LF7076	
SCALE : free, DIM. : mm		MANAGER	CHK	DRAWN	
DATE 1997-10-17		<i>y.s</i>		Tamura	
SANKYO DENKI Co.,Ltd.					